


HAND DRYER

MODEL: NT800

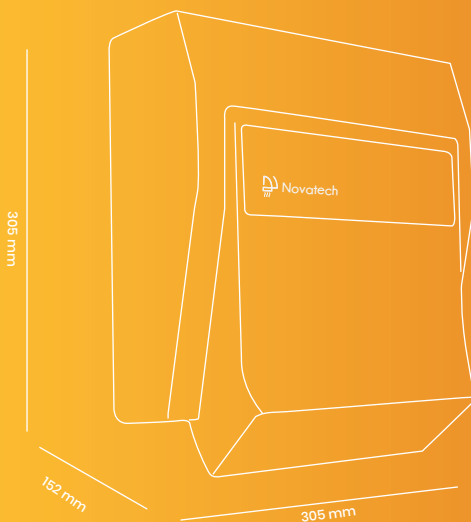

Cabinet	Innovatively designed shock proof cabinet with MRF Vapocure for scratch-free, glossy and durable finish
Motor	FHP Motors with double side sealed ball bearings
Suitable Traffic	Medium/High
Mounting	Wall Mounted
Operation	Fully Automatic
Hand Dry Time	<30 seconds
Noise Level	50 dB(A)
Motor Speed	2800 RPM
Voltage	220V / 50 Hz
Rated Power	1700W
Current	7.7 A
Air Speed	20 m/s
Blowing Volume	160 m ³ /h
Dimensions	305x305x152 mm

- Twin blower model
- Rust proof powder coated chassis.
- Dynamically balanced aluminium impeller.
- Infrared sensors (TI, USA) with double emitters and single detector.
- Heater assembly with thermostat. Protects hand dryer against burnout in case of motors failure.
- Glass filled, fire retardant finger guard.
- SS fasteners.
- Oxygen free lugs.
- Modular components for ease of servicing.